

Contactors

Solenoid Contactors

Part #	Type	Coil Volts (DC)	Maximum Inrush Amps	Length	Width	Height	Terminal Size
119 722	Intermittent	12	400	3"	2-1/4"	3"	1/4"
155 309	Continuous	12	400	3"	2"	3"	1/4"


Definite Purpose Contactors

Part #	Full Load Amps	# of Poles	Coil Voltage (AC)		Terminals	Contact Cover	Dimensions		
			50 Hz	60 Hz			L	W	H
111 864	25	1	24	24	Fric. w/scr., 1/4"	No	3-1/4"	2"	2-5/8"
175 828	25	1	24	24	Fric. w/scr. (90°), 1/4"	No	3"	2"	2-5/8"
129 696	25	1	24	24	Fric. w/scr., 1/4"	No	3-1/4"	2"	2-5/8"
108 358	25	2	24	24	Fric. w/scr., 1/4"	No	3-1/4"	2"	2-5/8"
145 407	25	2	24	24	Fric. w/scr., 1/4"	Yes	3-1/4"	2"	2-5/8"
146 274	25	2	24	24	Fric. w/scr., 1/4"	Yes	3-1/4"	2"	2-5/8"
406 240-003	30	2	24	24	Screw	No	3-1/4"	2"	2-5/8"
406 243-003	40	3	24	24	Fric. w/scr., 1/4"	No	3-5/8"	2-1/8"	3-1/4"
189 486	40	3	24	24	Screw	Yes	5"	2-7/8"	3"
132 889	40	3	24	24	Screw	Yes	3-5/8"	2-5/8"	3-1/2"
160 760	40	3	24	24	Fric. w/box lug, 1/4"	Yes, w/hole	3-5/8"	2-7/8"	3"
180 270	40	3	24	24	Fric. w/box lug, 1/4"	Yes, w/hole	3-5/8"	2-1/4"	3"
187 416 ¹	60	2	110	110/120	Screw/tab	Yes, w/hole	3-3/4"	3-3/4"	4-1/2"
186 355	60	3	110	110/120	Screw/tab	Yes, w/hole	3-1/4"	2-3/4"	3"
114 780	60	3	110	110/120	Screw/tab	Yes	3-5/8"	3-1/2"	3-3/4"
114 781 ²	60	3	110	110/120	Screw/tab	Yes	3-5/8"	3-1/2"	3-3/4"
188 035 ¹	60	3	110	110/120	Screw/tab	Yes, w/hole	3-3/4"	3-3/4"	4-1/2"
160 793	60	3	24	24	Fric. w/box lug, 1/4"	Yes, w/hole	4"	3"	3"
160 794	75	3	24	24	Fric. w/box lug, 1/4"	Yes	5-1/4"	3-1/2"	4-1/2"
177 551 ³	75	3	110	110/120	Screw/tab	Yes, w/hole	5-1/4"	3-1/2"	4-1/2"
137 901 ¹	75	3	110	110/120	Screw/tab	Yes, w/hole	5-1/4"	3-1/2"	4-1/2"
182 172 ²	75	3	110	110/120	Screw/tab	Yes, w/hole	5-1/4"	3-1/2"	4-1/2"


¹With control bracket

²With interlock

³With links

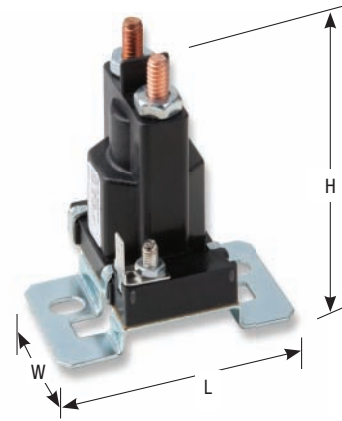

#175 828

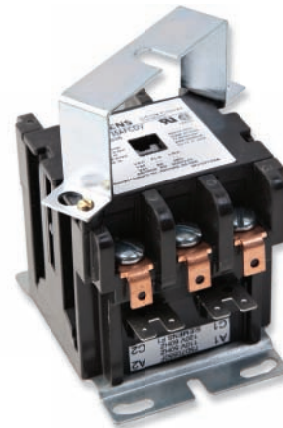

#188 035



#160 794